



item No.	length	Inner carton packing quantity
11.99.4325	5m±30mm	30pcs
11.99.4329	10m±100mm	20pcs

### SPECIFICATION

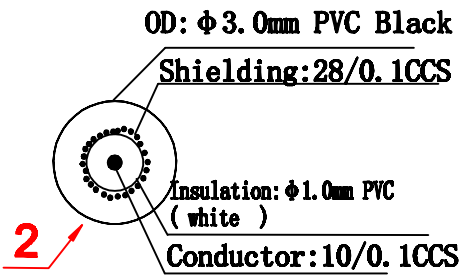

### WIRING DIAGRAM

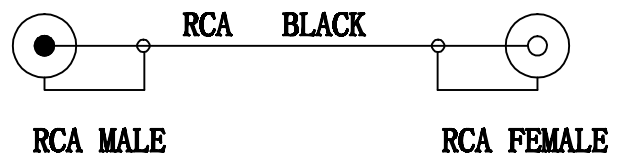

NO.	PARTS NAME	SPECIFICATION STANDARD	QTY
4	MOULDED1	PVC 45P black	2*10g
3	CABLE	AUDIO CABLE Black	L
2	CONNECTORS2	RCA Female Nickel Plated	1PCS
1	CONNECTORS1	RCA Male Nickel Plated	1PCS

- TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
- INSULATION RESISTANCE: 100Meg Ohm.
- WITHSTAND VOLTAGE: 300 VOLTS RMS, 1 MINUTE.
- OPERATING TEMPERATURE RANGE: -20°C TO + 75°C.
- 100% RoHS & REACH COMPLIANT.

DRAWING APPROVED \_\_\_\_\_ DATE: \_\_\_\_\_  
 SAMPLE APPROVED PER \_\_\_\_\_ DATE: \_\_\_\_\_  
 DRAWING SPECIFICATIONS

 SCALE NONE SHEET 1/1 DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED .X ± .XX ± .XXX ± ANGLES ± REV. 00 CUS. REV	NAME VALUE Cinch Cable, simplex M - F, black ITEM NO. 11.99.4325/11.99.4329 CUS. P/N <b>1RCA M TO 1RCA F</b> DRAWING NO. <b>MW-SIN -002</b>	 ENG. DATE CHECKED DATE APPROVED DATE
---	--	--

REV.	MODIFY DESCRIPTION	DATE
01	NEW ISSUE	2018.03.22