



Datenblatt - Fiche technique - Data sheet

11.01.1045




ROLINE Paralleldruckerlabel DB25 ST - Centr.36 ST, grau, 4,5 m

ROLINE Câble parallèle d'imprimante DB25 M - Centr.36 M, gris, 4,5 m

ROLINE Parallel Printer Cable, DB25 M - C36 M, grey, 4.5 m

RoHS COMPLIANT

4500+100/-0MM

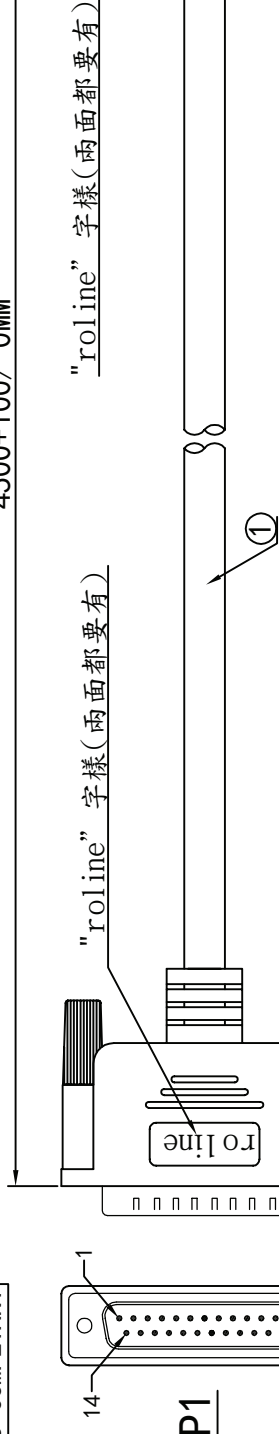

WIRE ADDRESS

P1	P2	P1	P2
1	1	14	14
2	2	15	32
3	3	16	31
4	4	17	36
5	5	18	33
6	6	19	19
7	7	20	21
8	8	21	23
9	9	22	25
10	10	23	27
11	11	24	29
12	12	25	30
13	13	SHELL	SHELL


DB 25P MALE (2)(4) *2PCS

NOTE:

1. CABLE: NON-UL 30AWG*25C+AE (CU) OD=7.0MM JACKET: PVC BEIGE;
2. CONN: DB 25P MALE INSULATION: BLUE, SHELL NICKEL-PLATED;
3. CONN: CN 36P MALE INSULATION: BLUE, SHELL NICKEL-PLATED;
4. OUTER MOLD: PVC 45P BEIGE;
5. SCREW: #4-40UNC 2.3*44MM BEIGE.




STICKER

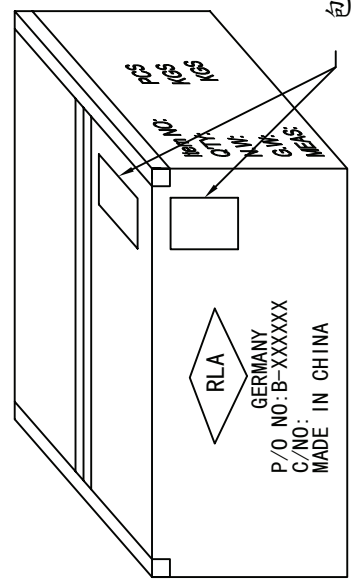

外箱尺寸
1.5' (45*34*28CM)
25PCS/箱

包裝箱貼紙(客供)
條碼朝外, 貼紙距紙箱邊緣2CM

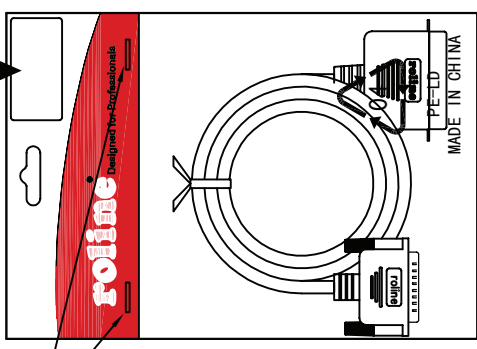

訂書針

1PCS/PE BAG (200*300*0.06MM) +HEAD
+STICKER+25PCS/CTN (1.5')

Electronic Test:

1. 100% TEST OPEN SHORT MIS-WIRE;
2. INSULATION RESISTANCE: 5M OHM MIN;

Company	Rotronic	Goods Code	11.01.1045	Draw	FC038 ZYF	Date	2012-06-20	
ITEM NO	Drawing Evidence:							
Goods NO	Unit (MM)							
original NO.	VER. A							
Rotronic. Co., Ltd							REVISE	Date
D								
C								
B								